



“ Committed to Quality ”

QEC CERTIFICATION



CERTIFICATION
Quality Management System

Certificate of Approval
This is to certify that the QMS of
Mangal Singh Brothers Private Limited
R Offc add: 473, Marwari Vidyalaya Building, Sardar Vallabhai Patel Road,
Mumbai 400004 India
Factory: A-33, TTC Industrial Area, MIDC,Thane Belapur Road, Khairane,
Navi Mumbai 400710India
Has been assessed and found to meet the requirements of
ISO 9001:2015
This certificate is valid for the following scope of operations
**Processing and Trading of various types of Power Transmission Belts and
Conveyor Belts**

Authorised by:  **R N Cooke**
Director

Date of Certificate Issue: 23 November 2022
Certificate Valid Until: 22 November 2023
Recertification audit before 13 November 2022. Certified since 13 December 2016.
This certificate is the property of SN Registrars (Holdings) Limited and remains valid
subject to satisfactory annual Surveillance audits.

SN Registrars (Holdings) Limited
Registration House, 22b Church Street,
Rushden, Northamptonshire,
NN10 9YT, UK
Tel: +44 (0) 1933 383261
Email: enquiries@qec.co.uk
Web: www.qec.co.uk
Company Number: 07659067

Certificate Number: QEC 87722163/17/Q Rev: 001





MANGAL SINGH BROTHERS PRIVATE LIMITED

Plot No. A33, TTC Indl. Area, MIDC, Thane-Belapur Road, Khairane, Navi Mumbai 400 710

Tel.: +91-22-2778 1170 / 2778 1689 / 2778 0668

Website: www.mangalsingh.com


EPDM High Torque Timing Belt

MegaTorque EP

MITSUBOSHI



Brand New Versatile Tooth Profile !!

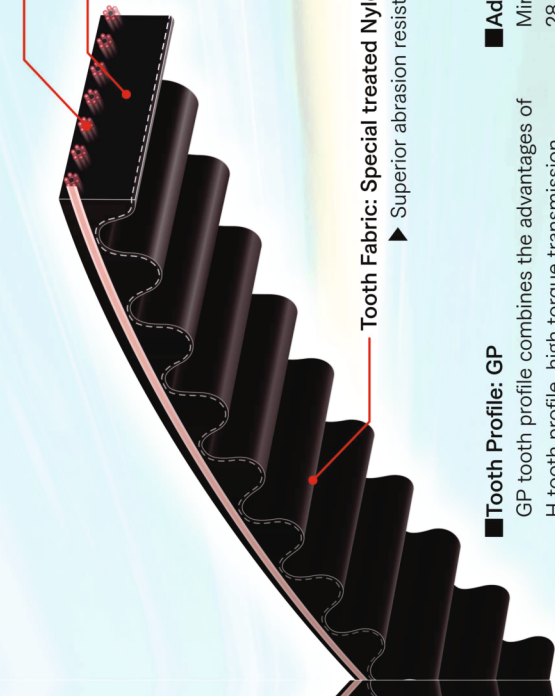

- ▶ Cord: Glass
- ▶ High Reliability
- ▶ Rubber: EPDM
- ▶ Temperature Range: -40~120°C (-40~248°F)
- ▶ Lowest temperatures for intermittent use
- ▶ High Stiffness
- ▶ Antistatic
- ▶ Weight Reduction
- ▶ Halogen Free

▶ **Tooth Fabric: Special treated Nylon**

▶ Superior abrasion resistance

■ Tooth Profile: GP

GP tooth profile combines the advantages of H tooth profile, high torque transmission, and S tooth profile, smooth meshing with low friction and noise.

■ Applicable for H, GT™ and R pulleys

※GT™ is trademark or registered trademark of Gates Corporation.

■ Adaptability to small diameter pulleys


Minimum number of teeth: 22 teeth (GP8M) / 28 teeth (GP14M)

■ Energy Efficient




Durability

Thanks to high stiffness EPDM rubber and special treated nylon fabric, MEGA TORQUE EP is superior in durability than H series and competitor's belt.

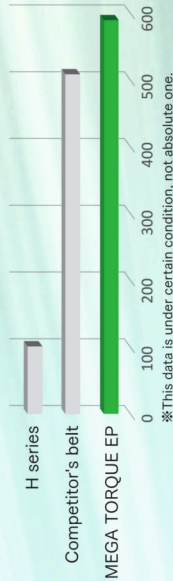


Jumping Torque

Adopting new GP tooth profile and high stiffness EPDM rubber, MEGA TORQUE EP has a high jumping torque and prevents tooth jumping at quick acceleration and slowdown.

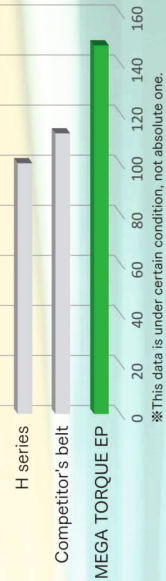

Power Rating

Adopting new GP tooth profile, high stiffness EPDM rubber and special treated nylon fabric, MEGA TORQUE EP's power rating is more than twice of the H series and almost equal to that of competitor's belt.

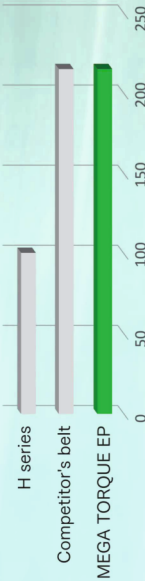

Toughness for severe conditions!!

MEGA TORQUE EP features high stiffness EPDM rubber and special treated nylon fabric with superior abrasion resistance. Thanks to these features, MEGA TORQUE EP with versatile tooth drives these applications under the severe conditions.

For HVAC



For Textile Machinery



For Forestry Machinery



For Automotive Assembling Line



MITSUBOSHI BELTING LTD. GROUP

※ Please see our catalog "Industrial Power Transmission Belts" for the details of Safety Precautions.

V899DATA2209UR01949B75

MEGA TORQUE EP

Product Code & Size List

■ GP8M (Tooth Pitch: 8mm)

Product Code

1512 MT GP8M 20 EP

Belt Length (mm) MEGA TORQUE Tooth Profile Belt Width (mm) Specification (EP)

Standard Belt Sizes

Product Code	Number of Teeth	Product Code	Number of Teeth	Product Code	Number of Teeth
560 MT GP8M	70	1064 MT GP8M	133	1760 MT GP8M	220
576 MT GP8M	72	1104 MT GP8M	138	1800 MT GP8M	225
600 MT GP8M	75	1120 MT GP8M	140	2000 MT GP8M	250
640 MT GP8M	80	1160 MT GP8M	145	2200 MT GP8M	275
720 MT GP8M	90	1224 MT GP8M	153	2400 MT GP8M	300
800 MT GP8M	100	1200 MT GP8M	150	2600 MT GP8M	325
840 MT GP8M	105	1280 MT GP8M	160	2800 MT GP8M	350
880 MT GP8M	110	1440 MT GP8M	180	3048 MT GP8M	381
920 MT GP8M	115	1512 MT GP8M	189	3280 MT GP8M	410
960 MT GP8M	120	1584 MT GP8M	198	3600 MT GP8M	450
1040 MT GP8M	130	1600 MT GP8M	200	4400 MT GP8M	550

■ GP14M (Tooth Pitch: 14mm)

Product Code

2450 MT GP14M 40 EP

Belt Length (mm) MEGA TORQUE Tooth Profile Belt Width (mm) Specification (EP)

Standard Belt Sizes

Product Code	Number of Teeth	Product Code	Number of Teeth	Product Code	Number of Teeth
966 MT GP14M	69	1960 MT GP14M	140	3150 MT GP14M	225
994 MT GP14M	71	2002 MT GP14M	143	3304 MT GP14M	236
1120 MT GP14M	80	2100 MT GP14M	150	3360 MT GP14M	240
1190 MT GP14M	85	2240 MT GP14M	160	3500 MT GP14M	250
1260 MT GP14M	90	2310 MT GP14M	165	3850 MT GP14M	275
1302 MT GP14M	93	2380 MT GP14M	170	3920 MT GP14M	280
1344 MT GP14M	96	2450 MT GP14M	175	4144 MT GP14M	296
1400 MT GP14M	100	2520 MT GP14M	180	4326 MT GP14M	309
1568 MT GP14M	112	2590 MT GP14M	185	4410 MT GP14M	315
1610 MT GP14M	115	2660 MT GP14M	190	4578 MT GP14M	327
1750 MT GP14M	125	2730 MT GP14M	195	4956 MT GP14M	354
1778 MT GP14M	127	2800 MT GP14M	200		
1890 MT GP14M	135	3136 MT GP14M	224		